



Samsung Galaxy Light Screen Replacement

New screen

Written By: Paul Goyette



INTRODUCTION

Use this guide for replacing the screen on a Samsung Galaxy Light. The guide shows how to disassemble the device to replace the screen.

Before replacing the Samsung Galaxy Light screen, you need to remove or disconnect the following components:

- Back cover
- Battery
- Screws
- Midframe
- Motherboard
- Motherboard and screen connectors
- Headphone jack assembly, vibrator, and earpiece speaker assembly




TOOLS:

- [iFixit Opening Tools](#) (2)
 - [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Removing back cover



 Before removing the back cover, make sure the Samsung Galaxy Light is switched off.

- Using a plastic opening tool, lift up the back cover of the device.
- Remove the back cover.

Step 2 — Lifting battery out



- Using your finger, remove the battery from the device.

Step 3 — Unscrew motherboard from plastic protection



- Using a Phillips #0 screwdriver, remove 9 screws.

Step 4 — Removing the cover




- Using the plastic opening tool, separate the midframe from the front panel of the device.
- Remove the midframe.

Step 5 — Detach motherboard



- To detach the motherboard from the device:
 - Using the plastic opening tool, remove the connector from the motherboard.
 - Carefully lift the motherboard up and move it toward the left side of the device.
 - Using the plastic opening tool, remove the connector on the back side of the motherboard.

Step 6 — Removing audio and vibrator

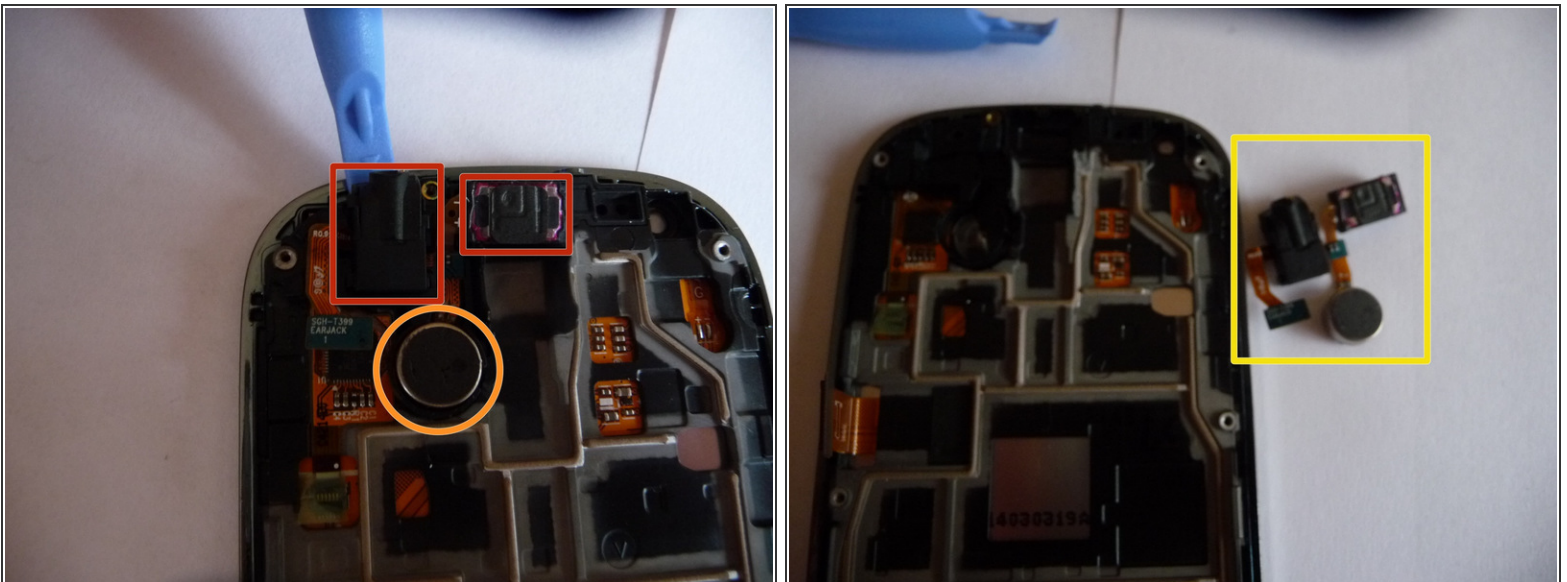


- Using the plastic opening tool, remove the headphone jack assembly along with the connected to it vibrator (highlighted in orange) and earpiece speaker assembly (highlighted in red).

Step 7 — Removing the Audio device support




- Using the plastic opening tool, remove the audio device support.


Step 8 — Remove the screen connector from the back

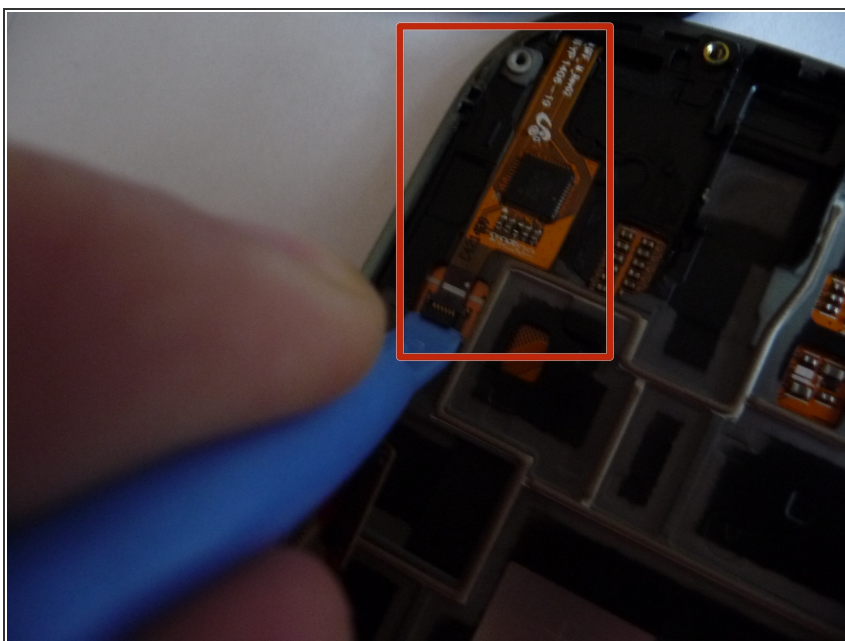

- Using the plastic opening tool, open the latch and remove the screen connector.

Step 9 — removing the screen

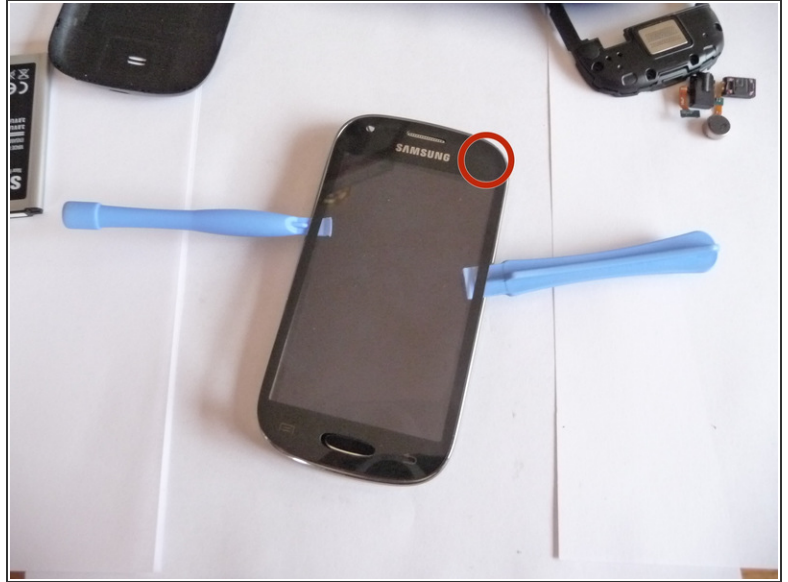

 When separating the glass from the front panel, be careful moving the plastic opening tool around the place of the screen connection (highlighted in red).

- To remove the screen:
 - Apply heat to the front of the device.
 - Using 2 plastic opening tools, separate the glass from the front panel.

Step 10 — Reinserting the screen



- Replace the screen and press on it to secure the connection.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-24 01:14:08 PM.